


TRIANGULAR PULL-UP BAR

K-016



The construction consists of three vertical columns and three crossbars for pull-ups 1200 mm in length (1758 mm optional crossbar length is possible). Crossbars are secured to the columns with aluminium clamps at the height that corresponds to the wishes of the Client.

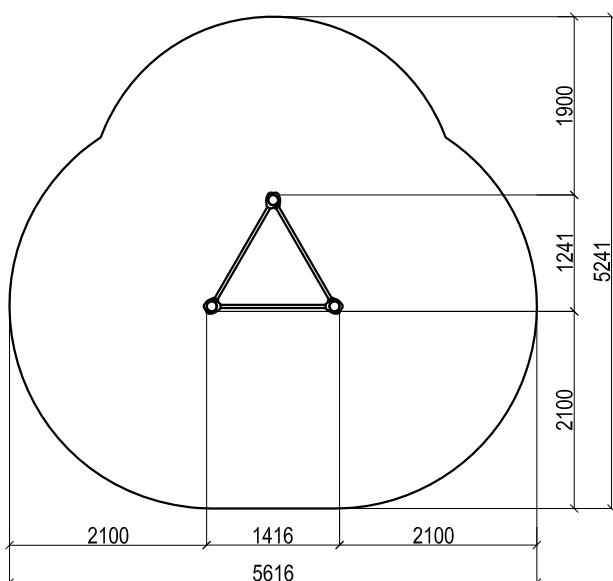

TECHNICAL DESCRIPTION

LENGTH:	1416 MM	
WIDTH:	1241 MM	
HEIGHT:	2650 MM	
LONGEST PART WHEN TRANSPORTING:	3350 MM	
WEIGHT:	120 KG	
REQUIRED GROUND AREA:	5616 X 5241 MM	
PIPE MEASUREMENTS:	DIAMETER:	WALL THICKNESS:
	108 MM	3.2 MM
	34 MM	3.2 MM
METAL PARTS:	POWDER COATED STEEL RAL 7016	
CLAMPS:	POWDER COATED ALUMINUM ALLOY RAL 3020	
BOLTS:	HOT GALVANIZED BOLTS M10	
MAX. CROSSBAR HEIGHT:	2300 MM	
USER AGE:	CHILDREN UNDER 14 YEARS ONLY UNDER SURVEILLANCE OF PARENTS	
MAX. USER WEIGHT:	130 KG	
CERTIFICATES:	TÜV RHEINLAND INTERCERT KFT	

CERTIFIED:



Precisely Right.

RECOMMENDED:

