
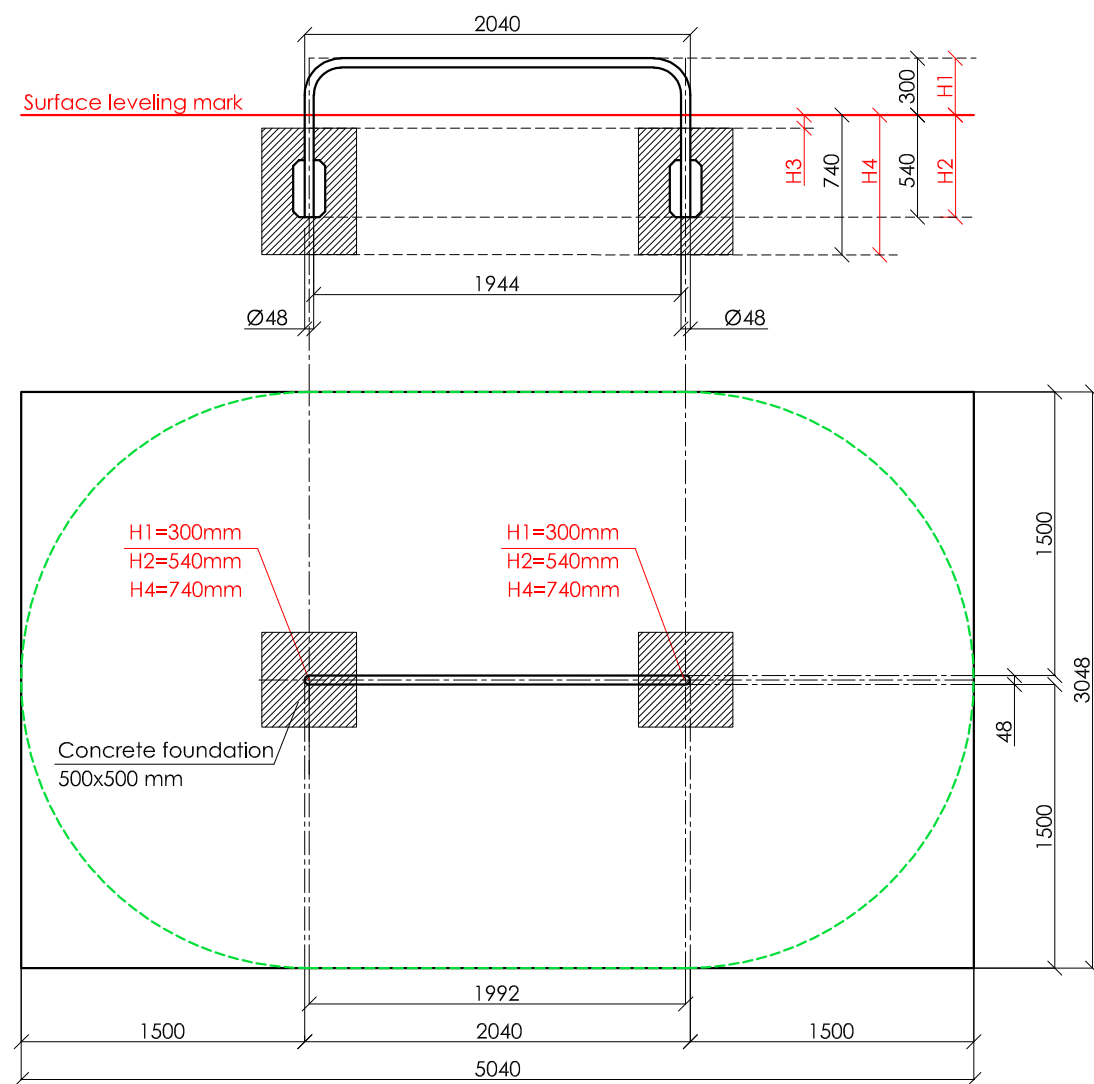


SCALE 1:40



**KENGURU  
PRO**

"KENGURU PRO" LTD

Address: Lauteres street 4, Riga, Latvia, LV-1002  
 VAT Reg. No. 40103750152  
 Bank: A/S Luminor bank, SWIFT: RIKOLV2X,  
 Bank Account: LV65RIKO0002930161161  
 e-mail: info@kengurupro.eu  
 www.kengurupro.eu

PK-007

Kenguru PARKOUR



The structure consists of one curved bar. The upper horizontal surface of the bar is 1650 mm long. Bar is symmetrically curved at the angle of 90 degrees and creates the construction at the height of 300 mm from the foundations. Weight – 15.00 kg

**Installation instructions:**

- Choose a suitable underground for the unit (see page 2, table 2)!
- Prepare the construction pit with a drilling machine or other devices.
- Before pouring the concrete all structures elements must be leveled and fixed.
- Complex elements must be fixed and bolted together with metal clamps.
- Ready-made C25 concrete should be used.
- Crossbars installation height can be changed according to customer's wishes.
- Approximately 0,15m<sup>3</sup> concrete is needed for each spot foundation.
- Under the structures we recommend to install absorbing rubber cover.

The size of the hole for the foundation is depending on the consistency of the ground. The dimensions mentioned above are applicable for normal conditions with firm ground. If the ground is extremely soft, a much bigger foundation is needed. Use only appropriate material and follow the installation instructions closely!!!

**Foundation plan and area of movement of the Kenguru PARKOUR complex PK-007**

**Technical information**

Foundation when using Shock absorbing underground (synthetic – rubber granulates)		Beveling of foundation when using loose filling material		Technical information	
<b>H3</b>	<b>Drop height</b>	<b>H3</b>	<b>Drop height</b>	width:	48 mm
40 mm	> 1.2.....1.4 m	20 cm	< 1.0 m	height:	300 mm
50 mm	> 1.5.....1.7 m	30 cm	< 2.0 m	length:	2040 mm
60 mm	> 1.8.....2.0 m	40 cm	< 3.0 m	largest part:	2160 mm
70 mm	> 2.1.....2.5 m			weight:	15,0 kg
				floor space required:	3048 x 5040 mm
				pipe measurements:	diameter: wall thickness:
					48,3 mm 3,0 mm
				metal parts:	stainless steel AISI 304, brushed surface
				metal clamps:	-
				bolts for metal clamps:	-
				max. free fall height:	< 300 mm possible underground see DIN 79000:2012-05 Tab.2 or installation instructions
				user height:	> 140 cm
				maximum user weight:	130 kg
				certificates:	TÜV Rheinland InterCert Kft.

